

PRODUCT DATASHEET

Model: LX2T101 LX3T101 LX4T101

Category: LED Track Light

Description: 18w LED Track Light



General Information

Material: Aluminum + Iron

Fitting Colors: Matte White/ Black

Rotation Angle (degree): 355

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -20 - +32

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 75

Diameter (mm): 137.2 x 33.6

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

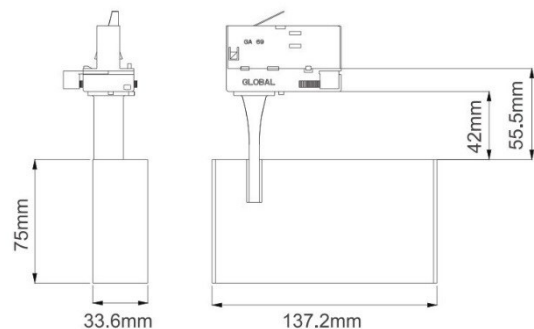

Packing Information

Packaging Type: Individual box

Quantity per carton: 20

CBM per carton: 0.0312

Gross weight per carton (kgs): 16

Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: LX2T101 LX3T101 LX4T101

Category: LED Track Light

Description: 18w LED Track Light



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	1027	47
2700	95	100	951	43
3000	90	90	1075	49
3000	95	100	999	45
4000	90	90	1143	52
4000	95	100	1056	48
5000	80	90	1344	61

LED Manufacturer: Luminus

LED Type: SMD

LED Model: MP-3030

Optic: Reflector + Lens + Diffuser

Beam Angle (°): 66

Electrical Information

System Power (w): 22

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 34.4 – 37.6

Current (mA): 500

Non-Dimmable: RiO RD018SPF04-KG-RIO01

Power Factor: 0.92

Efficiency (%): 86

Ripple (%): <14

Dimmable: Triac Dimming – Upon Request

Dali Dimming – Upon Request