

PRODUCT DATASHEET

Model: LX2T102 LX3T102 LX4T102

Category: LED Track Light

Description: 36w LED Track Light



General Information

Material: Aluminum + Iron

Fitting Colors: Matte White/ Black

Rotation Angle (degree): 355

Tilting Angle (degree): 90

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -20 - +32

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 75

Diameter (mm): 270.2 x 33.6

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

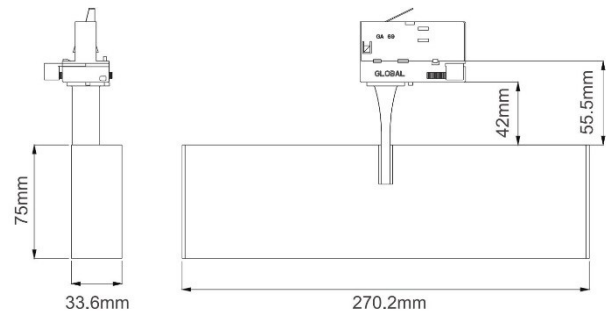

Packing Information

Packaging Type: Individual box

Quantity per carton: 20

CBM per carton: 0.03

Lifespan

Lifetime (hours): 50000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: LX2T102 LX3T102 LX4T102

Category: LED Track Light

Description: 36w LED Track Light



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	2086	50
2700	95	100	1930	46
3000	90	90	2183	52
3000	95	100	2027	48
4000	90	90	2144	51
5000	80	90	2729	65
5000	90	90	2729	65

LED Manufacturer: Luminus

LED Type: SMD

LED Model: MP-3030

Optic: Reflector + Lens + Diffuser

Beam Angle (°): 66

Electrical Information

System Power (w): 42

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 34.4 – 37.6

Current (mA): 500

Non-Dimmable: RiO RD018SPF04-KG-RIO01

Power Factor: 0.92

Efficiency (%): 86

Ripple (%): <14

Dimmable: Triac Dimming – Upon Request

Dali Dimming – Upon Request