

PRODUCT DATASHEET

Model: L2T605 L3T605 L4T605

Category: LED Tracklight

Description: 30w LED Tracklight



General Information

Material: Aluminium

Fitting Colors: White/ Black/ Painted Silver

Rotation Angle (degree): 350

Tilting Angle (degree): 180

Track System: Available in single wire, 3 wire, 3 phase

IP Rating: 20

Working Temperature (°C): -5 - +35

Storage Temperature (°C): -20 - +50



Product Dimensions and Cut-out Information


Fitting Length (mm): 40

Diameter (mm): 300

Height (mm): Not Applicable

Cut-out Dimension (mm): Not Applicable

Dimension:

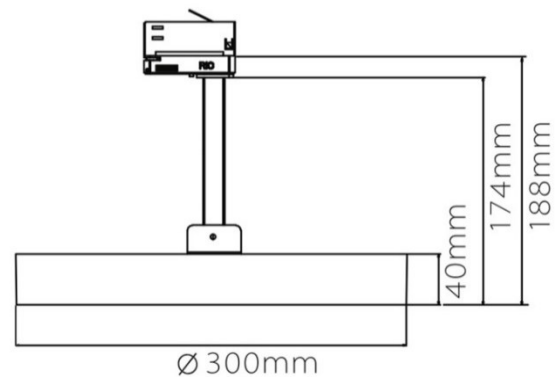

Packing Information

Packaging Type: Individual box

Quantity per carton: 4

CBM per carton: 0.0855

Gross weight per carton (kgs): 7.5

Lifespan

Lifetime (hours): 30000

Luminous Flux after 50000hours (lm): LM80 Comply

PRODUCT DATASHEET

Model: L2T605 L3T605 L4T605

Category: LED Tracklight

Description: 30w LED Tracklight



Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	Not Applicable	Not Applicable
2700	95	100	Not Applicable	Not Applicable
3000	90	90	2502	79
3000	95	100	Not Applicable	Not Applicable
3000 Vivid White	90	110	Not Applicable	Not Applicable
4000	95	100	Not Applicable	Not Applicable
5000	80	90	Not Applicable	Not Applicable
5000	90	90	Not Applicable	Not Applicable

LED Manufacturer: Luminus

LED Type: SMD

LED Model: 3014

Optic: Diffuser

Beam Angle (°): 90

Electrical Information

System Power (w): 31

Input Voltage (v) & Frequency: 220-240V 50/60Hz

Output Voltage (v): 25-57

Current (mA): 900